

**User's Guide
for
L15 GPS Tracker**

Preparation before Using

In order to better use the tracker, please read the following instructions carefully and operate the watch accordingly.

- Please check if the model number is correct and if accessories are complete or not.
- Please choose a SIM card which supports GSM/LTE and power off the watch before installing the SIM card.
- Please make sure that the SIM card is activated has data connection and VOLTE function.
- You need a smart phone to install mobile App.

In the package, there are:

- L15 tracker x 1
- Magnetic charger x 1
- User manual x 1
- IMEI QR code bar x 1

Note: the QR code bar is normally pasted on the gift box.

Product Details



Mic: Do not cover it when calling.

Horn: Listen to call

SIM card: The place to insert a nano SIM card.

Red-button: 1、 Long-press it will power on / power off.

2、 After storing the contact number in the APP, press the red button once to change the contact, and press the green button once to dial. Short press the red button to end the call.

Green-button: Long press the green button to automatically measure body temperature once.(Optional function)

Orange -button: 1、 SOS button. Press the button for 3 seconds to dial out an emergency number in case of emergency.

2、 Short press the button to report the time

Magnetic charge pin: Charge

Infrared thermometer: High-precision measurement of body temperature(Optional function)

Main Functions:

The main functions of this tracker are:

Precise localization: guardian can obtain the wearer's accurate location at any moment.

Emergency calling: users can call for help by pressing the Orange SOS button in case of emergency.

Fitness tracking: it can test body temperature and steps.

Bi-directional calling: wearer can call his/her friends while the guardian can call the wearer at any time.

How to Use the Button



Power on: Long press the red button to power on the device.

Power off: Long press the red button to turn off the device's power supply.

SOS: Long press the SOS bottom 3 seconds for SOS calling, the device will call preset SOS numbers one by one till answered.

Need to add emergency contact in the app first.

Note: After you start SOS, you cannot actively hang up the phone on the device. Only SOS contacts can answer or hang up calls. The purpose of doing this is to prevent SOS assistance from being mistakenly suspended in emergency situations.

Tracker interface

Clock: The L15 main interface will display information such as time, 4G signal, battery level, step count, etc,

Step: The 5-digit number below the step is the number of steps. It clears at 0 o'clock every day.

Phone book: If you have set up phone book through our app or SMS command, pressing the red button once will display the first phone book number, and pressing it again will display the next phone book number. In any phone book interface, pressing the green button once can call the contact. Pressing the red button will loop between the contact and time interface



Charge the tracker:

- 1: Place L15 on the charging dock
- 2: Use a type C USB cable to connect the dock and adapter
- 3: L15 will provide a voice prompt to start charging



Attention:

- 1) Please use a 5V-1A power adapter to charge L15.
- 2) Please use the power adapter provided by the seller and be cautious when using other unverified power adapters.

SIM Card Operation Guide and charging

Plug-in SIM card: Please make sure that the device is off before installing SIM card. Use the SIM PIN pull out the SIM card cover, insert the SIM card into the card sleeve as instructed, then push it into the watch, and turn it on.

After plugged-in SIM card, wait for one minute to see if the GSM/LTE signal is shown on the display screen.



Standard -SIM card		25mm×15mm	
Micro-SIM card		15mmx12mm	SIM1
Nano-SIM card		12mm x 9mm	SIM2

Please check:

- 1) If the device time is synchronized with the current time.
- 2) If you can call the watch with your phone.



App Installation

After the watch is activated with SIM card, please install the watch APP on your mobile phone before using the watch. Below are two ways to install app :

- 1) a. Scan below QR code;
b. Search “ai care” on GooglePlay or iOS store to download the watch APP.




- 2) After App installation, please create a new account and enter basic information like user name, password, mail box, etc. Then enter the login page, input the phone number or mail box and password while registration, and finally press “sign in” to enter.

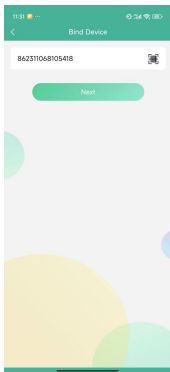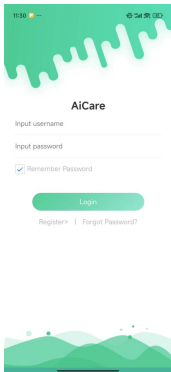


- 3) If it's the first time you login the account, you will be requested to bind the watch and the App with the device's IMEI code.
- 4) Enter into device "User information", and input the requested information, such as profile picture, nickname, birthday, height, weight, etc

Two way call

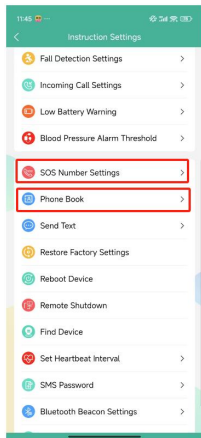


Enter into Watch Setting on the front page of the App, you can add contact phone number for your watch.

In the app, you can set 10 phone books.



SOS Call

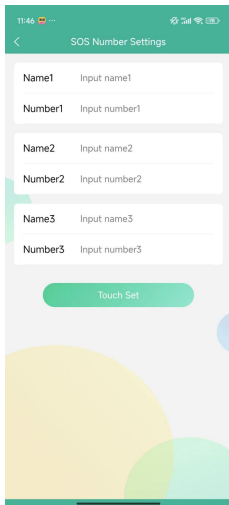


App main page - Function – SOS Number, input maximum 3 numbers and confirm setting to synchronize it to the watch. Press the watch main button over 3 seconds, it will call the SOS numbers one by one, at the same time, an alarm will be sent back to server.

On the app you set the incoming call restriction switch to on, then you can only receive calls from the white list.

GPS Positioning

On the App “Home Page”, press “Location” to enter into sitemap and check device location.

There are 3 types of working modes:

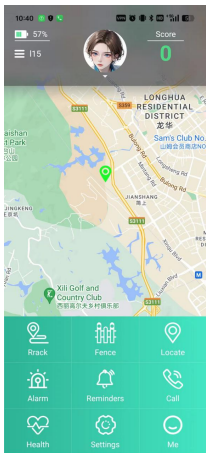

1. Default mode, the watch opens Wifi + LBS, send the location to the server every 15 minutes.

2. Emergency mode, the watch opens GPS + Wifi + LBS, send the location to the server every minute.

3. Energy saving mode, the watch opens Wife + LBS, send the location to the server every 60 minutes.

Note: There might be position deviation or App update failure due to signal weakness sometimes.

Pedometer

On the watch's home screen, the 5-digit number below the step is the number of steps. It clears at 0 o'clock every day. You can also view more detailed exercise information on health page in the App, such as steps, distance, calories,etc. 12345 is the steps



Health Measuring:

(This is an optional feature, please confirm with the dealer whether the device you purchased has this feature.)

Long press the green measurement button, and the vibration prompt will start measuring body temperature. If the measure is finish, it will vibrate again, then can check the result.

The circular hole in the middle of the upper back is an infrared temperature measurement chip

Normal body temperature within 37.5, green


37.5-38.8 Abnormal body temperature, yellow reminder

High body temperature above 38.8, red alert




Security Fence

In the Electronic Fence interface, you can set up a secure fence area. select its range,confirm to save it. You can repeat it to add several secure fence areas. You can also modify it or remove the security fence you set up earlier.

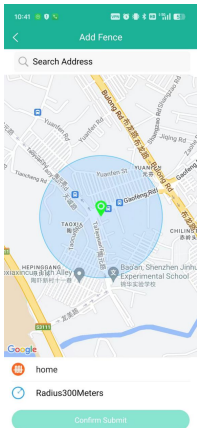

Trajectory History

Trajectory tracking interface, you can check the latest trajectory history. Enter trajectory tracking page, the above setting button you can choose to load lbs / Wi-Fi data or not. Below you can select the date to view the historical track

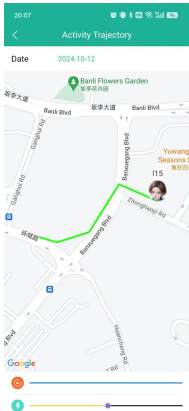

SMS command Functions

- In addition to using a mobile app to control L15, you can also use SMS command to control L15. The following are the SMS commands format and corresponding function instructions.
- `#sos#=13845234567,13799898876,#` set sos number to L15
- `#addphb#=13845234567,tom#` add a contact to L15
- `#delphb#=13845234567#` delete a contact from phone book
- `#inqphb#` check the phone book
- `#location#` get a last location from L15
- `#mode#=180,1#` set L15 report location to server every 180 seconds and GPS is on, if the last number is 0, it mean GPS is turn off
- `#shutdown#`. Turn off L15
- `#reboot#` make L15 restart
- `#reset#` set L15 back to factory setting
- `#timeauto:on/off#` turn off watch get time from network
- `#datetime:2019.06.18,19:24` set time to L15
- `#status#` Check the setting status of L15
- `#ip#=198.11.183.28,5088#` Set L15 to send data to the specified server

Safety Warning

- Recommend use original accessories, the manufacturer is not responsible for problems caused by the use of non-original accessories.
- Don't try to repair it by yourself. The modification of the product will affect its security.
- Avoid using the watch in the following environment: places with excessive temperature fluctuations, places with the temperature higher than 60°C or lower than 0°C, places with high pressure, dust or electrostatic interference.
- Avoid touching with corrosive cleaning agents and chemicals. Please use a soft, dry cloth to clean the watch.
- It is prohibited to use the watch at the gas stations, restricted chemical plants or near the oil depots, for the use of the watch in the above environment may raise the risk of explosion.
- When you travel by airplane, please take the watch in the baggage, and try not to put it in the handbag while going through the checkpoint. The manufacturer is not responsible for the damage caused by such radiation.

About

There will be continuous upgrades and updates to this product, thus the content will be different with the final operating steps which are subject to change without prior notice.

The illustrations in the User's Guide are only for your reference. The manufacturer reserves the right of final explanation of the User's Guide.

This tracker is not a medical device, and the measured health data is for reference only. Cannot be used for medical diagnosis.